

COMP 4081
Exam 2
Fall 2015

Name: _____, _____
Last name First name

Rules:

- No potty breaks.
- Turn off cell phones/devices.
- Closed book, closed note, closed neighbor.
- WEIRD! Do not write on the backs of pages. If you need more pages, ask me for some.

Reminders:

- Verify that you have all pages.
- Don't forget to write your name.
- Read each question carefully.
- Don't forget to answer every question.

1. [10pts] Match the design pattern to the situation to which you should apply it.

- | | |
|--------------------------------|--|
| Builder <input type="radio"/> | <input type="radio"/> Your application needs to generate large, complex XML files (from scratch). |
| Façade <input type="radio"/> | <input type="radio"/> Your program must support switching among several different database management system libraries (e.g., MySQL, PostgreSQL, SQLite), but each one has a slightly different interface. |
| Adapter <input type="radio"/> | <input type="radio"/> Using a compiler subsystem requires lots of big, ugly code, involving scanner, parser, byte-code stream, and other objects. |
| Observer <input type="radio"/> | <input type="radio"/> Your program has to create a complex RTF (Rich Text Format) document object based on user input. |
| Strategy <input type="radio"/> | <input type="radio"/> Your application code was written to expect a TextShape interface; however, the 3 rd -party library provides a TextView object with a slightly different interface. |
| | <input type="radio"/> Your Call of Duty program needs to listen for keyboard and mouse clicks to manipulate how a player character moves, shoots, etc. |
| | <input type="radio"/> You need to implement a family of algorithms such that each algorithm provides a different way to break a stream of text into lines. |

2. [2pts] True or false? In the agile development process taught in class, the development team estimates each user story and decides the priority for each story.

- a. True
- b. False

3. [2pts] True or false? It is better to discover defects later in the development process. That way, you can have more of the system finished before you worry about fixing things.

- a. True
- b. False

4. [9pts] Answer the following 3 related questions:

- What often-false assumption does the waterfall software engineering process make?
- Why does this false assumption cause considerable problems for waterfall?
- How does iterative development overcome these problems?

For the next two questions, consider the GitHub web app.

5. [4pts] Reverse engineer a user story for some functionality provided by GitHub. You may omit the estimate and priority. Use the full template and style guidelines given in class.

6. [4pts] Describe two things that are wrong with this user story for GitHub functionality.

<p>AJAX Profile Form The update-profile form should use <i>AJAX</i> so that when the user presses the "Update profile" button, the data is saved, but the page does not reload.</p>
--

7. [2pts] Which of the following should a user story not do?
- Be short
 - Describe one thing the software needs to do for the customer
 - Discuss specific technologies
 - Be written using language the customer understands
 - None of the above

Consider these code fragments.

- `end`
- `get :index`
- `assert_redirected_to car_path(assigns(:car))`
- `assert_template :index`
- `assert_template :new`
- `assert_not_nil assigns(:cars)`
- `get :new`
- `test "should get index" do`
- `post :create, car: {make:@car.make, model:@car.model, year: @car.year}`
- `assert_response :success`

8. [6pts] Using the above fragments, create a functional test for the “index” page of a car-themed web app. The test should make sure (1) that the HTTP response does not report an error, (2) that the correct ERB is rendered (index.html.erb), and (3) that the call to `Car.all` in the controller, which sets the `@cars` instance variable, does not fail and return nil. Note that your answer should use only 6 of the above fragments.

9. [2pts] Which of the following is true of exhaustive testing?
- a. Tests all possible inputs
 - b. Generally infeasible in practice
 - c. Typically results in an intractably large set of test cases even for small programs
 - d. All of the above
 - e. None of the above
10. [2pts] Which of the following is not a difference between unit tests and integration tests?
- a. Unit tests should be fast (less than half a second), whereas integration tests may be slower
 - b. Unit tests should not perform I/O, whereas integration tests may do so
 - c. Unit tests should be deterministic, whereas integration tests may have non-determinism
 - d. Unit tests must be black-box tests, whereas integration tests must be white-box tests
 - e. None of the above (they are all differences)
11. [2pts] Which of the following is not a difference between black-box and white-box testing?
- a. White-box tests often aim to achieve particular levels of code-coverage, whereas black-box tests do not
 - b. Black-box tests are based only on the interface of a component, whereas white-box tests are based on the implementation
 - c. Black-box tests often focus on boundary cases, whereas white-box tests tend not to
 - d. White-box tests are made by programmers, whereas black-box tests are made by ordinary users.
 - e. None of the above (they are all differences)

Consider the following test cases for the `binary_search` function in Figure 1.

	array	key	imin	imax
a.	[1]	0	0	0
b.	[1]	1	0	0
c.	[1]	2	0	0
d.	[1, 2, 3]	1	0	2
e.	[1, 2, 3]	2	0	2
f.	[1, 2, 3]	3	0	2
g.	[1, 2, 3]	1	2	0
h.	[1, 2, 3]	2	2	0
i.	[1, 2, 3]	3	2	0

12. [5pts] Select tests from the above to create a test suite that provides statement coverage of the `binary_search` function. Your suite should contain the minimum number of tests to provide the coverage.

13. [5pts] Select tests from the above to create a test suite that provides condition coverage of the `binary_search` function. Your suite should contain the minimum number of tests to provide the coverage.

14. [5pts] Select tests from the above to create a test suite that provides path coverage of the `binary_search` function. Cover only paths that contain one loop iteration or fewer (i.e., no path should enter the loop more than once). Your suite should contain the minimum number of tests to provide the coverage.

15. [2pts] How do you prevent SQL injection?

- a. Escape queries
- b. Merge tables
- c. Interrupt requests
- d. All of the above
- e. None of the above


16. [2pts] Which of the following does authorization aim to accomplish?

- a. Restrict what operations/data the user can access
- b. Flag the user if he/she misbehaves
- c. Determine if the user is an attacker
- d. Determine who the user is
- e. None of the above

17. [2pts] Which of the following is an authentication method?

- a. Secret question
- b. Password
- c. Retinal scanner
- d. SMS code
- e. All of the above

18. [2pts] What type of attack did the parents in this XKCD comic perform?

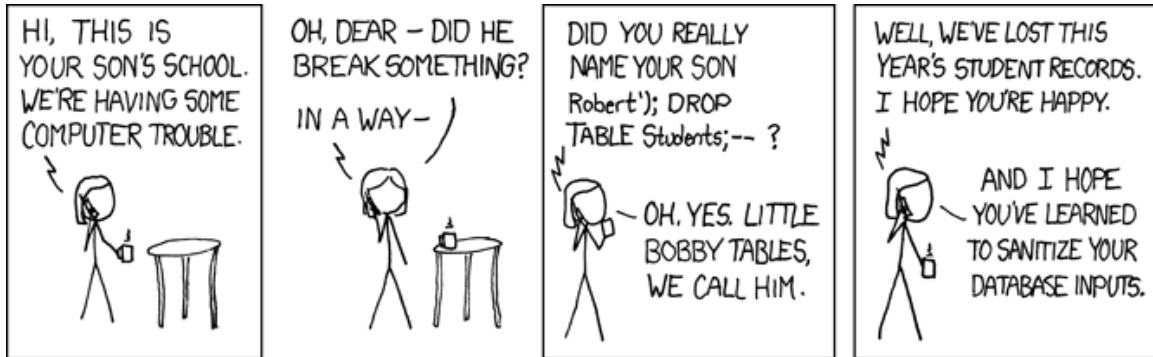

- a. Cross-site scripting
- b. SQL injection
- c. Reverse lookup
- d. Child endangerment
- e. Mask and shift

19. [2pts] Which of the following is not a security exploit?

- a. Cross-site scripting
- b. Eavesdropping
- c. Authentication
- d. SQL Injection
- e. None of the above (i.e., they are all security exploits)

20. [2pts] Where does the packet sniffing happen?

- a. Over the network
- b. In the database
- c. On GitHub
- d. All of the above
- e. None of the above

Figures

```
def binary_search(array, key, imin, imax)
  while imin <= imax
    imid = (imin + ((imax - imin) / 2)).to_i;
    if array[imid] == key
      return imid
    elsif array[imid] < key
      imin = imid + 1
    else
      imax = imid - 1
    end
  end
  return -1
end
```

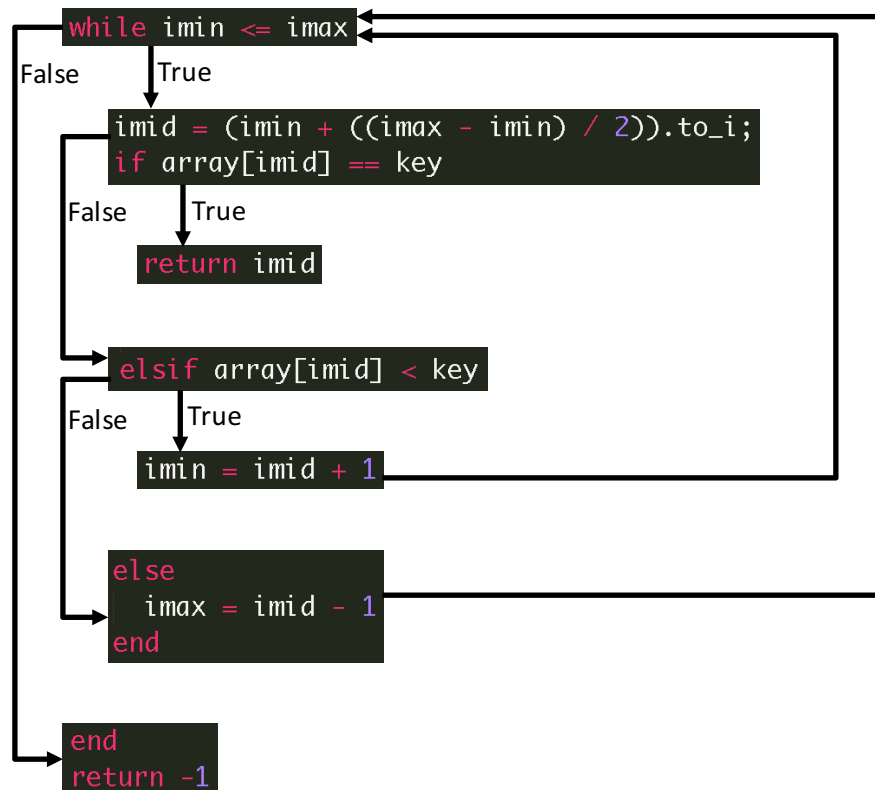


Figure 1. Binary search function and its associated control-flow graph.